

Redblade Pty Ltd

Dextron Heatshrink

Chan-Yeh BO-38 Shrink Tunnel



Operation:

Place tunnel behind sealer. Turn power on set temperature setting, adjust conveyor speed to suit appropriate shrink, you are now ready for production.

Characteristics and strong points:

- *Adjustable temperature control
- *Variable speed conveyor
- *Variable fan speed control
- *3 fans for optimum air flow
- *Live roller conveyor
- *Viewing window

Power Requirements:


415v, 3 phase, 32 amp.

Machine dimensions: (LxWxH)

1800x960x1690

Shrink tunnel dimensions: (LxWxH)

1200x600x350

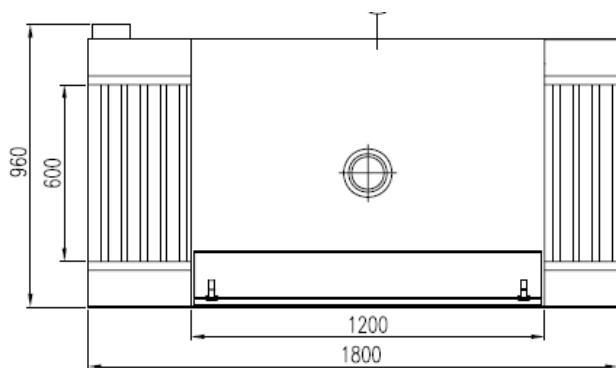

www.redblade.com.au

3 Elliot Street, Albion, Queensland 4010

Phone: 07 32622344 Fax: 07 32622074

Email: sales@redblade.com.au